


## Adjustable pressure-fed Flat Fan Air Atomizing Nozzles

For flat fan spray, dimensions "A" "B" "C" are the pattern width at certain distance from the nozzle, as shown in picture. The total spray distance of spray projection from the nozzle to the maximum dispersal point is represented by "D". When using a pressure-fed liquid system, the liquid is supplied to the nozzle under pressure. The liquid and compressed air or gas are mixed internally to produce a completely atomized spray.

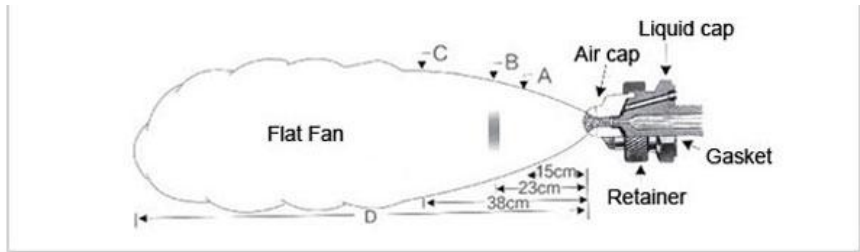

Remark: No. 1158 retainer and 3612 gasket must be ordered separately from the spray set-up. But is included in the standard nozzle assembly.

### Flat fan spray

Spray set-up No.	Spray set-up consists of fluid and air cap combination	Liquid capacity(L/h)and Air capacity(L/min)																Spray size				
		0.7bar		1.5bar		水压 Water pressure 2bar		3bar		4bar		Air pressure (bar)		Liquid flow (L/h)		Air (L/min)		A (cm)	B (cm)	C (cm)	D (m)	
SU13A	Liquid cap	0.7	5.5	24	1.3	9.1	31	2.0	8.6	42	2.7	11.2	52	3.9	12.0	69	1.1	0.7	25	36	46	2.6
	2050	0.85	4.7	27	1.5	7.7	36	2.2	7.5	47	3.0	10.1	56	4.6	9.7	81	2.1	1.5	36	48	66	3.0
	/	1.0	4.1	31	1.8	6.5	42	2.5	6.2	52	3.2	9.1	62	5.3	7.5	93	2.8	2.0	38	53	76	3.2
	Air cap	1.1	3.5	34	2.1	5.4	47	2.8	5.2	57	3.5	8.1	66	6.0	5.3	104	3.5	3.0	47	61	86	3.4
	73328	1.3	3.0	37	2.4	4.3	52	3.1	4.2	63	4.2	5.4	79	6.3	4.3	110	6.0	4.0	56	74	94	4.0
SU13	Liquid cap	0.7	5.5	24	1.3	9.1	31	2.0	8.6	42	2.7	11.2	52	3.9	12.0	69	1.1	0.7	25	36	46	2.6
	2850	0.85	4.7	27	1.5	7.7	36	2.2	7.5	47	3.0	10.1	56	4.6	9.7	81	2.1	1.5	36	48	66	3.0
	/	1.0	4.1	31	1.8	6.5	42	2.5	6.2	52	3.2	9.1	62	5.3	7.5	93	2.8	2.0	38	53	76	3.2
	Air cap	1.1	3.5	34	2.1	5.4	47	2.8	5.2	57	3.5	8.1	66	6.0	5.3	104	3.5	3.0	47	61	86	3.4
	73328	1.3	3.0	37	2.4	4.3	52	3.1	4.2	63	4.2	5.4	79	6.3	4.3	110	6.0	4.0	56	74	94	4.0
SUN13	Liquid cap	0.7	5.5	24	1.3	9.1	31	2.0	8.6	42	2.7	11.2	52	3.9	12.0	69	1.1	0.7	25	36	46	2.6
	2850	0.85	4.7	27	1.5	7.7	36	2.2	7.5	47	3.0	10.1	56	4.6	9.7	81	2.1	1.5	36	48	66	3.0
	/	1.0	4.1	31	1.8	6.5	42	2.5	6.2	52	3.2	9.1	62	5.3	7.5	93	2.8	2.0	38	53	76	3.2
	Air cap	1.1	3.5	34	2.1	5.4	47	2.8	5.2	57	3.5	8.1	66	6.0	5.3	104	3.5	3.0	47	61	86	3.4
	73335	1.3	3.0	37	2.4	4.3	52	3.1	4.2	63	4.2	5.4	79	6.3	4.3	110	6.0	4.0	56	74	94	4.0
SU14	Liquid cap	0.7	5.5	24	1.3	9.1	31	2.0	8.6	42	2.7	11.2	52	3.9	12.0	69	1.1	0.7	25	36	46	2.6
	2850	0.85	4.7	27	1.5	7.7	36	2.2	7.5	47	3.0	10.1	56	4.6	9.7	81	2.1	1.5	36	48	66	3.0
	/	1.0	4.1	31	1.8	6.5	42	2.5	6.2	52	3.2	9.1	62	5.3	7.5	93	2.8	2.0	38	53	76	3.2
	Air cap	1.1	3.5	34	2.1	5.4	47	2.8	5.2	57	3.5	8.1	66	6.0	5.3	104	3.5	3.0	47	61	86	3.4
	73320	1.3	3.0	37	2.4	4.3	52	3.1	4.2	63	4.2	5.4	79	6.3	4.3	110	6.0	4.0	56	74	94	4.0
SUN23	Liquid cap	0.7	5.5	24	1.3	9.1	31	2.0	8.6	42	2.7	11.2	52	3.9	12.0	69	1.1	0.7	25	36	46	2.6
	60100	0.85	4.7	27	1.5	7.7	36	2.2	7.5	47	3.0	10.1	56	4.6	9.7	81	2.1	1.5	36	48	66	3.0
	/	1.0	4.1	31	1.8	6.5	42	2.5	6.2	52	3.2	9.1	62	5.3	7.5	93	2.8	2.0	38	53	76	3.2
	Air cap	1.1	3.5	34	2.1	5.4	47	2.8	5.2	57	3.5	8.1	66	6.0	5.3	104	3.5	3.0	47	61	86	3.4
	15340	1.3	3.0	37	2.4	4.3	52	3.1	4.2	63	4.2	5.4	79	6.3	4.3	110	6.0	4.0	56	74	94	4.0
SU23B	Liquid cap	0.7	5.5	24	1.3	9.1	31	2.0	8.6	42	2.7	11.2	52	3.9	12.0	69	1.1	0.7	25	36	46	2.6
	40400	0.85	4.7	27	1.5	7.7	36	2.2	7.5	47	3.0	10.1	56	4.6	9.7	81	2.1	1.5	36	48	66	3.0
	/	1.0	4.1	31	1.8	6.5	42	2.5	6.2	52	3.2	9.1	62	5.3	7.5	93	2.8	2.0	38	53	76	3.2
	Air cap	1.1	3.5	34	2.1	5.4	47	2.8	5.2	57	3.5	8.1	66	6.0	5.3	104	3.5	3.0	47	61	86	3.4
	125358	1.3	3.0	37	2.4	4.3	52	3.1	4.2	63	4.2	5.4	79	6.3	4.3	110	6.0	4.0	56	74	94	4.0
SU23	Liquid cap	0.7	5.5	24	1.3	9.1	31	2.0	8.6	42	2.7	11.2	52	3.9	12.0	69	1.1	0.7	25	36	46	2.6
	60100	0.85	4.7	27	1.5	7.7	36	2.2	7.5	47	3.0	10.1	56	4.6	9.7	81	2.1	1.5	36	48	66	3.0
	/	1.0	4.1	31	1.8	6.5	42	2.5	6.2	52	3.2	9.1	62	5.3	7.5	93	2.8	2.0	38	53	76	3.2
	Air cap	1.1	3.5	34	2.1	5.4	47	2.8	5.2	57	3.5	8.1	66	6.0	5.3	104	3.5	3.0	47	61	86	3.4
	125328	1.3	3.0	37	2.4	4.3	52	3.1	4.2	63	4.2	5.4	79	6.3	4.3	110	6.0	4.0	56	74	94	4.0
SU43	Liquid cap	0.7	5.5	24	1.3	9.1	31	2.0	8.6	42	2.7	11.2	52	3.9	12.0	69	1.1	0.7	25	36	46	2.6
	100150	0.85	4.7	27	1.5	7.7	36	2.2	7.5	47	3.0	10.1	56	4.6	9.7	81	2.1	1.5	36	48	66	3.0
	/	1.0	4.1	31	1.8	6.5	42	2.5	6.2	52	3.2	9.1	62	5.3	7.5	93	2.8	2.0	38	53	76	3.2
	Air cap	1.1	3.5	34	2.1	5.4	47	2.8	5.2	57	3.5	8.1	66	6.0	5.3	104	3.5	3.0	47	61	86	3.4
	159351	1.3	3.0	37	2.4	4.3	52	3.1	4.2	63	4.2	5.4	79	6.3	4.3	110	6.0	4.0	56	74	94	4.0

Adjustable pressure-fed Flat Fan Air Atomizing Nozzles have the following features:

- Adjustable pressure-fed Flat Fan Air Atomizing Nozzles produce finely atomized spray, mist or fog
- Both Air and liquid working pressure is usually 2 -3 bar.
- Adjustable flow rate allows different choices of capacities
- Adjustable pressure-fed Flat Fan Air Atomizing Nozzles provide independent control of liquid, atomizing air and fan air pressure for fine tuning of flow rate, drop size, spray distribution and coverage.
- General Application :
  - Coating, cooling, humidifying
  - Gas cooling
  - Lubricating, moistening
  - Misting, fogging
  - Dust suppression